

Parker Series PCLAS

PEACH-PURE™

PEACH DEPTH STYLE, CLASSIFIER
LIQUID FILTER CARTRIDGES

For use in Parker Fulflo® vessels or
competitor vessels of similar design



The PEACH-Pure, Series PCLAS, provides consistent filtration for a wide variety of fluids. The PCLAS uses PEACH filtration technology to create a thermally bonded, three-dimensional depth filter with a fixed pore structure to classify contaminant capture and maintain


consistent efficiency throughout its life. This type of filtration acts as a sieve to focus on retaining targeted particle sizes while allowing smaller non-harmful particle sizes to pass through.

FEATURES	BENEFITS
Parker Engineered Media	Fibers of various sizes are thermally bonded to build, in house, specific filtration media recipes.
Thermal Bonded Fibers	Both individual fibers and media sheets are thermal bonded so no resins are required. This keeps the media pore structure open and provides excellent porosity and permeability.
3-Stage Classification Layers	Classifies particle capture within each layer to target specific sizes while allowing smaller non-harmful particles to pass through.
Conical Helix Flow Pattern	Creates a longer, tortuous flow path in radial, axial and helical directions which increases the probability of contaminant removal.
Rigid Construction	Rigid thermal bonded matrix creates a strong filter tube that prevents contaminant from unloading or channeling as differential pressure increases.
Environmentally Friendly 100% Synthetic Filter Media	Filter media is 100% synthetic and does not contain resins which can be of environmental concern. The media tube can be disposed of by incineration, crushing or shredding.
Silicone Free Construction	Helps prevent craters/fisheyes in inks and paints.

- Inks
- Paints
- Coatings
- Coolants
- Plating Solutions
- Chemicals
- Water
- Process Fluids
- Solvents

APPLICATIONS

CLASSIFIER FILTRATION MECHANICS

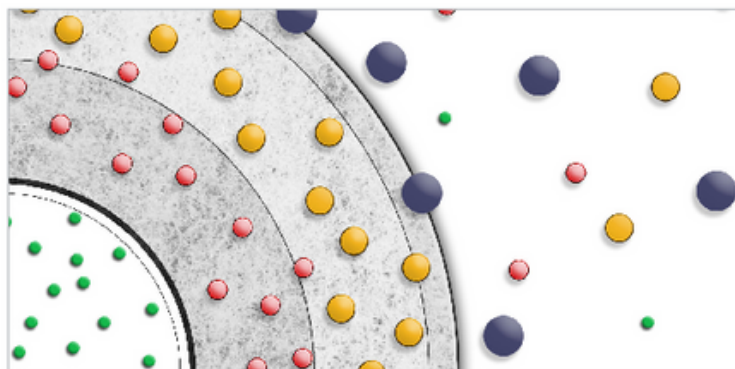

CONTAMINANT DISTRIBUTION

●	Large Particle Retention
●	Targeted Particle Retention
●	Non-harmful particles allowed to pass through

Efficiency remains consistent throughout life of cartridge.



Request pricing or learn more at [CentroSolves.com](https://www.centrosolves.com)
Division Manager | Tommy Hatmaker | thatmaker@centrosolves.com

MATERIALS

MEDIA	PEACH Depth Technology – Polyester
CORE	Polyester or 304 Stainless Steel
END CAPS	Standard – None See end cap options under ordering information
SEAL	None (Standard), Buna-N, EPR, Viton, Silicone

OPERATING DATA

FLOW DIRECTION: Outside-to-Inside

MAX TEMP: 240°F / 116°C

180°F / 82°F If using end treatment code S, SX or X

MAX. DIFFERENTIAL PRESSURE: 85 psid / 5.9 bar with steel core
50 psid / 3.4 bar with plastic core

RECOMMENDED CHANGE-OUT

DIFFERENTIAL PRESSURE: 50 psid / 3.4 bar with steel core
25–30 psid / 1.7–2.0 bar with plastic core

PH RANGE: 3–9

ORDERING INFORMATION

PCLAS	—	240	—	A	—	10		V	—	SS	
SERIES		SIZE				PERFORMANCE		SEAL		CORE	
		CODE	OD	LENGTH		CODE	MICRON	CODE	MATERIAL	CODE	MATERIAL
		209	2.5"	9.75"		02	2	BLANK	None	BLANK	Polyester
		210	2.5"	10"		05	5	B	Buna-N	SS	304 Stainless
		219	2.5"	19.5"		10	10	E	EPR		
		220	2.5"	20"		25	25	V	Viton		
		229	2.5"	29.25"		50	50	S	Silicone		
		230	2.5"	30"		75	75				
		239	2.5"	39"		125	125				
		240	2.5"	40"		200	200				

END TREATMENT	
CODE	END STYLE
A	Double Open End (DOE) *** No End Caps or Seal
O	Single Open End: Closed Top Cap / 222 O-Ring Seal Bottom Cap *** Requires Seal
S	Single Open End: Polypropylene Spring Closed Top / Std Open End Bottom *** No Seal
SX	Single Open End: Polypropylene Spring Closed Top / Open End Bottom with Polypropylene Extender *** No Seal
X	Double Open End w/ Polypropylene Extender *** No Seal
X2	Double Open End w/ Stainless Steel Extender *** No Seal

• Viton® is a registered trademarks of E. I. du Pont de Numours and Company.

© 2021 Parker Hannifin Corporation
DS-IND-PEACHPURE-PCLAS-210617

Parker Hannifin Corporation
Industrial Process Filtration Division
Phone 940-325-2575 | Toll Free 1-800-877-7326



Request pricing or learn more at Centrosolves.com
Division Manager | Tommy Hatmaker | thatmaker@centrosolves.com



Our mission is to be regarded by our customers and community as the best supplier of automation and control product solutions to industry.

CORPORATE OFFICE AND DISTRIBUTION CENTER

3315 Overton Crossing
Memphis, TN 38127
P: 901-357-1261 | F: 901-357-1379

CENTRO BRANCHES

320 Nancy Lynn Lane, Suite 7
Knoxville, TN 37919
P: 865-588-7473 | F: 865-588-8861

6800 Bert Kouns Industrial Loop
Shreveport, LA 71129
P: 318-221-2347 | F: 218-227-1927

321 Hill Avenue
Nashville, TN 37210
P: 615-255-2220 | F: 615-255-2212

3794 Abigail Drive
Theodore, AL 36582
P: 251-626-0100 | F: 251-626-0310

Advanced Industry Support

6400 Shelby View Drive, Suite 100
Memphis, TN 38134
901-383-9744 | F: 901-383-8369

7600 Hardin Drive
Little Rock, AR 72117
P: 501-835-2193 | F: 501-835-2277

102 Ashley Lane
El Dorado, AR 71730
P: 870-881-8383

2423 1st Avenue South
Irondale, AL 35210
P: 205-703-9810 | F: 205-703-9811